




RANGE HOOD USER MANUAL

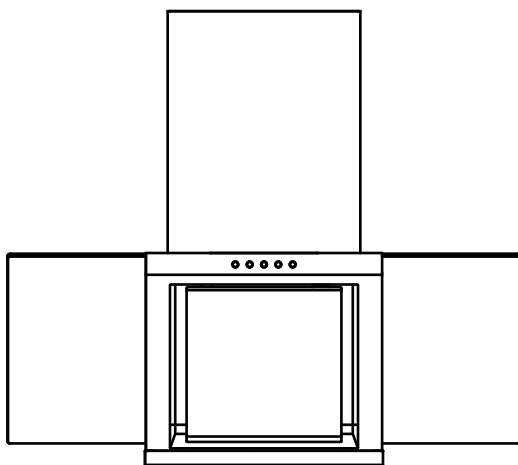

Model No: HCH-969BS

Please carefully **READ** these instructions **BEFORE INSTALLING AND USING** the appliance and retain them for future reference. Keep potentially hazardous packaging (plastic bags, polystyrenes.) out of reach of children.

Hood-European style

Thank you for choosing the European style hood.
Before using it, please read this instruction carefully, which will introduce the characteristics and notice to you, and lead your installation and maintenance.

Content

- Installation Notice 1
- Installation Diagram/ Assemble Step 2
- Installation Step 3
- Use&Operation/ Notice 4
- Knock-down Parts 5
- Main Technical Parameter 6
- Electric Principle/ Accessory 7
- Packing List 8
- Repair Service Card 8

Installation Notice


The hood should be installed by professional worker.

1. Install the hood (see Picture 1). A too high position will reduce exhaust effect, while a too low position will infect your cooking. Please adjust the position according to your family height.
2. If the smoke pipe is not long enough, please contact the local dealer to equip a suitable smoke pipe. Pay attention to the strictness of the joint when connect in order to avoid leak.
3. We have equipped the check valve in the accessory to prevent the wind return. So, please fix it carefully according to the requirement.
4. Because of the complexity and the flammability of the smoke, the exhaust gas is forbidden to go through the hot pipe. In case to avoid accident, please choose the smoke way carefully.

Installation Diagram

Picture 1

unit:mm

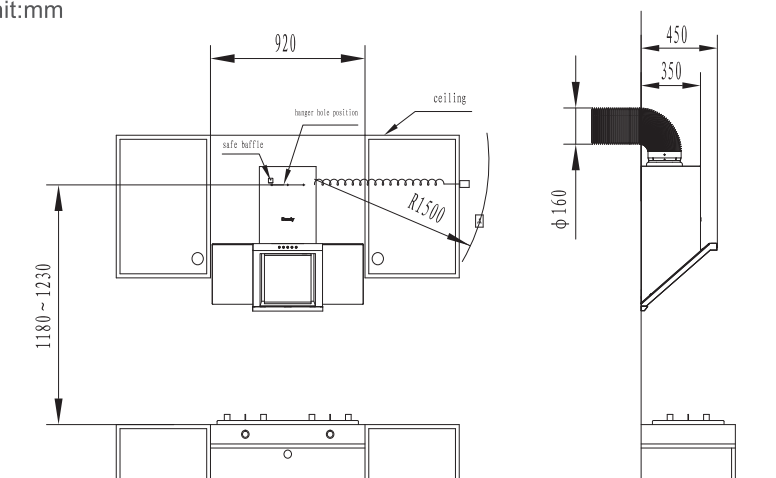


Caution: This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.


Assemble Step

1. Insert the decorative glass into the tube in front. (see picture 2)
2. Use four pieces of M4X12 screw B, four glass protector and four pieces sciew ring to fix the decorative grass to the bottom. (see picutre 3)

Picture2




Picture3




Installation Step

1. Drill holes according to the decided drilling position. The depth is 50mm. Insert the expansion bolts to fix the pothook strip to the wall.
2. Insert one end of the smoke pipe to the cricoid groove of the check valve (accessory). Fix the smoke pipe to the side face by two pieces of ST2.9 tapping screw. (see picture 4)
3. Hang the hood to the pothook strip firmly to keep it unswerving, and put the other end of the smoke pipe outside. (see picture 3)
4. Install the safety baffle.

Picture 4

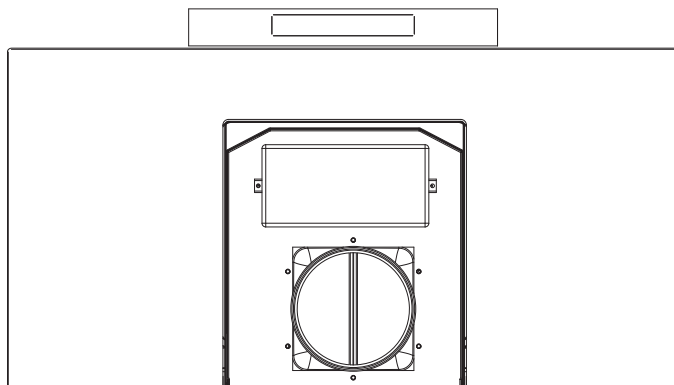

Picture 5

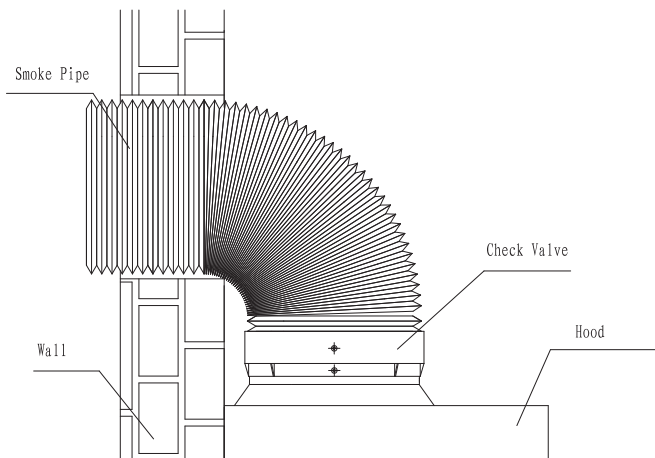

Use and Operation

After installation, electrify the hood, then you can use it. For the first time, please use it according to the operating instruction as follows. If there is any difference, please contact the local dealer or the local service department as soon as possible.

On the switch board, there are five function keystrokes “❄️ ❄️ ❄️ ⏻”, correspondingly “illumination, strong state, middle state, weak state, power (time-off)”. You can press the very keystroke according to your requirement. Press “❄️” if you want to exhaust strongly; press “❄️” or “❄️” if you want to lower the exhausting speed; press “⏻”, it will be off in three minutes; if you want to shut down it immediately, please press it twice.

Notice

1. The kitchen must be a drafty room.
2. Please clean the surface smear and dirt regularly, otherwise, the hood may be in danger of firing. Before cleaning, do take off the electric plug.
3. Take the accessory gently when tearing down. Use the litmusless wash, soft cloth and soft brush to clean it. The chemical impregnant and the alkali wash are strictly prohibited. And it is not allowed to scrape by hard object.
4. Clean up the oil cup duly to avoid overflow.
5. Forbid to roast the hood directly above the fire. If there is anything wrong with the hood such as abnormal noise, smell, fog and so on, please cut the power supply immediately. Then contact the professional maintenance man to deal with it.
6. Forbid the amateurs to tear down and repair the parts which cannot be taken down by customers. If the electrical line is destroyed, it must be changed by professional maintenance man of our company or the authorized service organization.
7. There is a fire risk if cleaning is not carried out in accordance with the instructions.
8. Do not flambé under the range hood.

Knock-down Parts

1. The Oil Cup

Install: use two hands to insert the oil cup from right to left direction in to the bottom of the hood.

Take-down: use two hands to take out the oil cup from left to right direction. It is forbid to move the oil cup during using hood or hob. When taking down the oil-cup, please prevent over strength in case accident.

2. The Protection tube

Screw off the four bolts on the protection tube by the cross-shaped. Lift it up and then take it down. (see picture 6)

It can only be done by professional worker.

3. The Hood cover

Screw the two bolts off the smoking cover by the cross-shaped screwdriver, and lift up, then take it down. (see Picture 7)

It can only be done by professional worker.

4. The Fan


a. After taking down the protection tube, use the cross-shaped screwdriver to screw off the bolts on the entrance cover board, then take down the entrance cover board and the outlet seal. (see Picture 8)

b. Screw off the fancap clockwise, then take out the fan. (see Picture 9)


It can only be done by professional worker.

CAUTION: Accessible parts may become hot when used with cooking appliances.


Picture 6

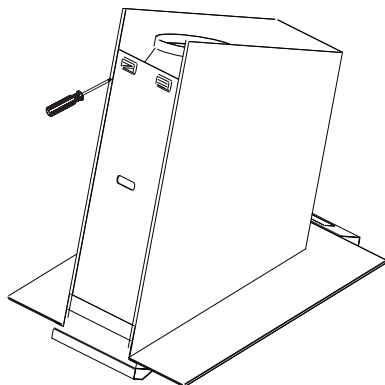


Picture 7

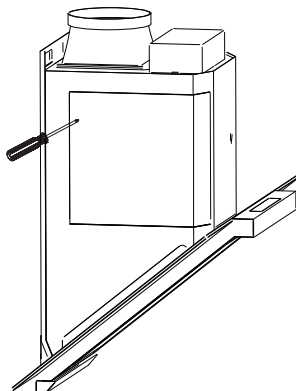

Picture 8

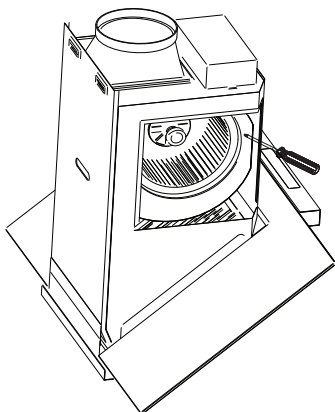


Picture 9

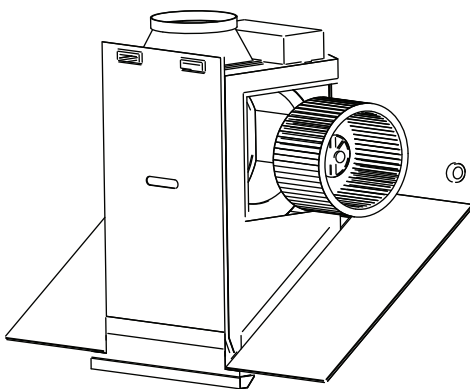

Main Technical Parameter


Style No.	HCH-969BS
Rated Voltage	220-240V
Rated Power	50Hz
Max Airflow	1000 m³/h
Max Noise Level	69dB
Max Press	≥300Pa
Standard Press	≥170Pa
Lighting	≤2W × 2
Motor Capacity	200W
Tot.Absorption	204W
Product Size	900 × 450 × 792 (mm)
N.W	25kg

Electric Principle

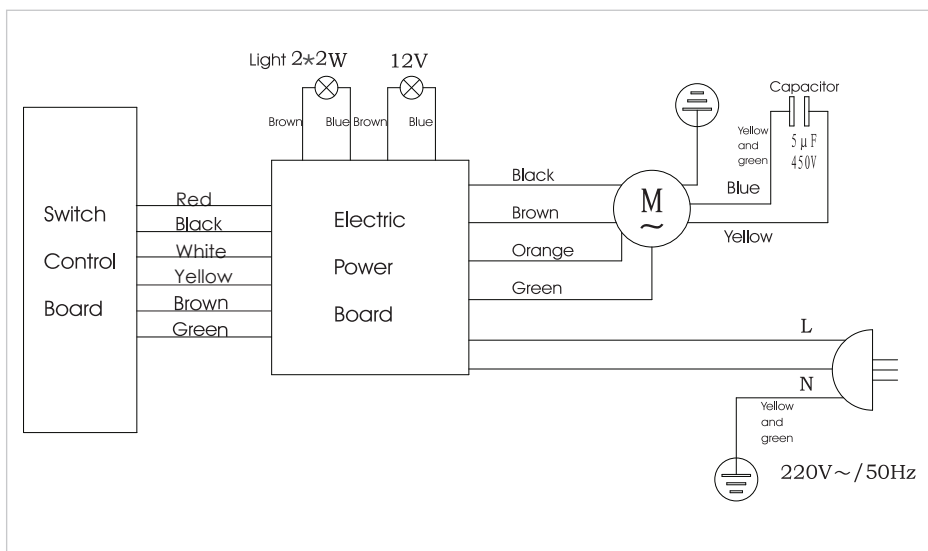

Accessory

CXW-200-1896

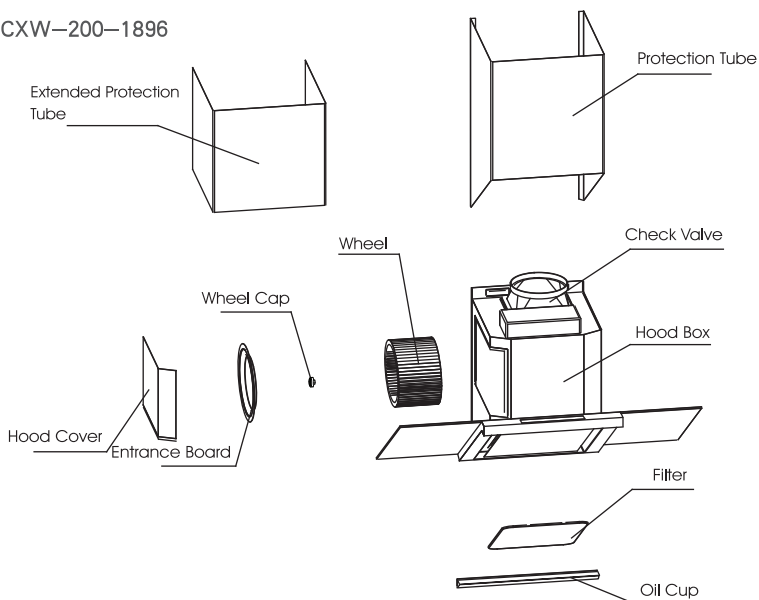

Packing List

1. one piece of hood
2. one piece of user manual
3. one piece of smoke pipe
4. one piece of hanger
5. three pieces of expansion tube $\phi 8 \times 48$
6. three pieces of screw $\phi 4.5 \times 45$
7. one piece of safety baffle
8. eight pieces of M4*12 screw A
9. four pieces of M4*12 screw B
10. two pieces of ST2.9*6 screw
11. one piece of hood flow exit
12. one coil of flow exit seal
13. four pieces of screw ring
14. four glass protector

The Repair Service Card

Service Date	Service Record	Sign by

